

2017: SICK GOES BIG ON 3D MULTI-LAYER LIDARS

Andrew Etherington - San Francisco
Daniel-Perez Bello - Germany



SICK
Sensor Intelligence.

SICK 2D LIDAR PRODUCT RANGE

LMS1xx

- Compact and economical
- Range up to 50 m
- Field of view: 270°

LMS4xx

- High measurement accuracy
- Range up to: 3 m
- Frequency: 500 Hz

LMS5xx

- Accurate with 5-echoes
- Range up to 80 m
- Field of view: 190°

NAV

- Precise navigation
- Range up to 250 m
- Field of view up to 360°

S100

- Compact anti-collision
- Range up to 10 m
- Field of view: 270°

new

LMS1000

- High speed (200 Hz) and outdoor immunity
- Range up to 64m
- Field of view: 275°


LD-LRS

- Long Range up to 250 m
- Field of view: 360°

TiMxxx

- Small, lightweight and low power consumption
- Range up to 25 m / field of view: 270°

new

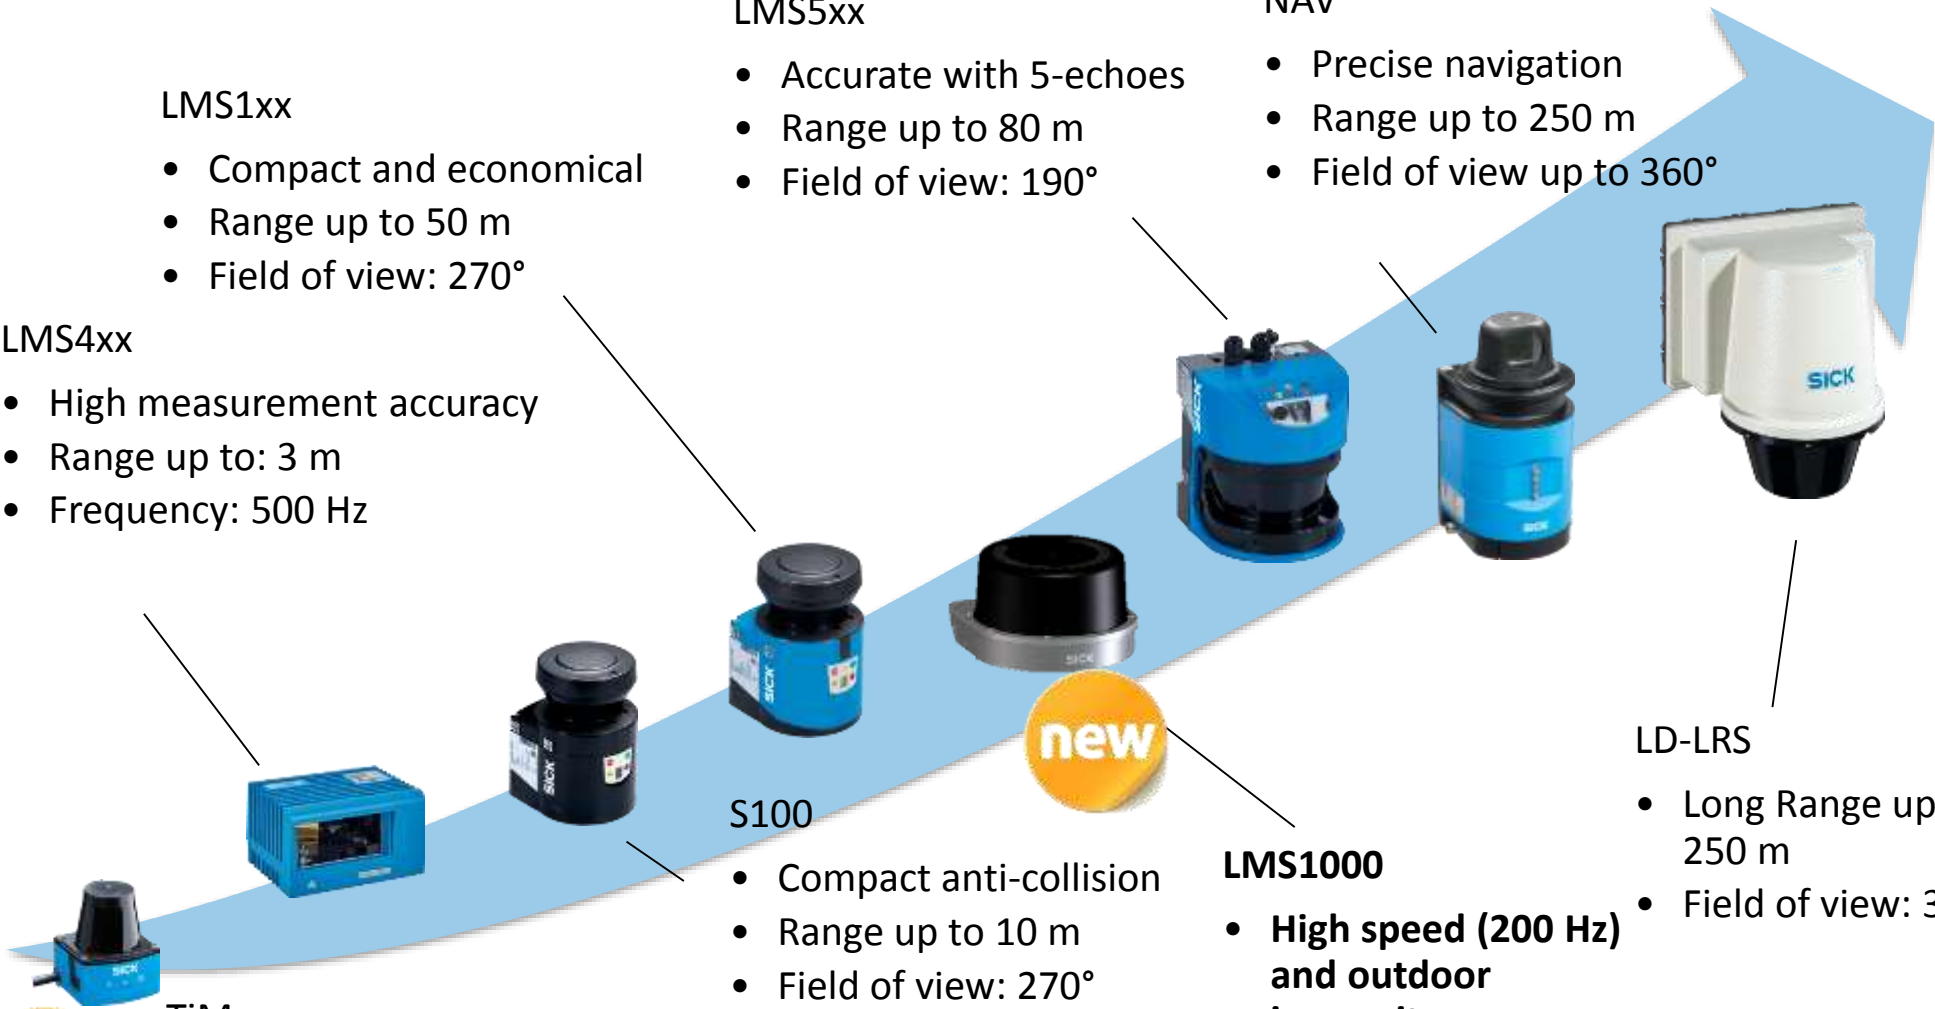

SICK 3D PRODUCT RANGE

MRS1000

- 4 Layers
- 64m max
- 1.6 kg

MRS6000

- 24 Layers
- 200m max
- 2.2 kg


LD-MRS UAV

- 4 Layers
- 300m max
- 0,77 kg

LD-MRS 4/8

- 4/8 Layers
- 300m max
- 1 kg

new MRS 1000 - indoor

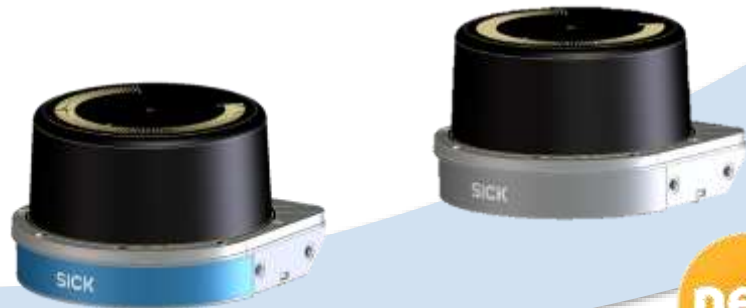

new MRS 1000 - Outdoor




new MRS 6000



new LD-MRS UAV



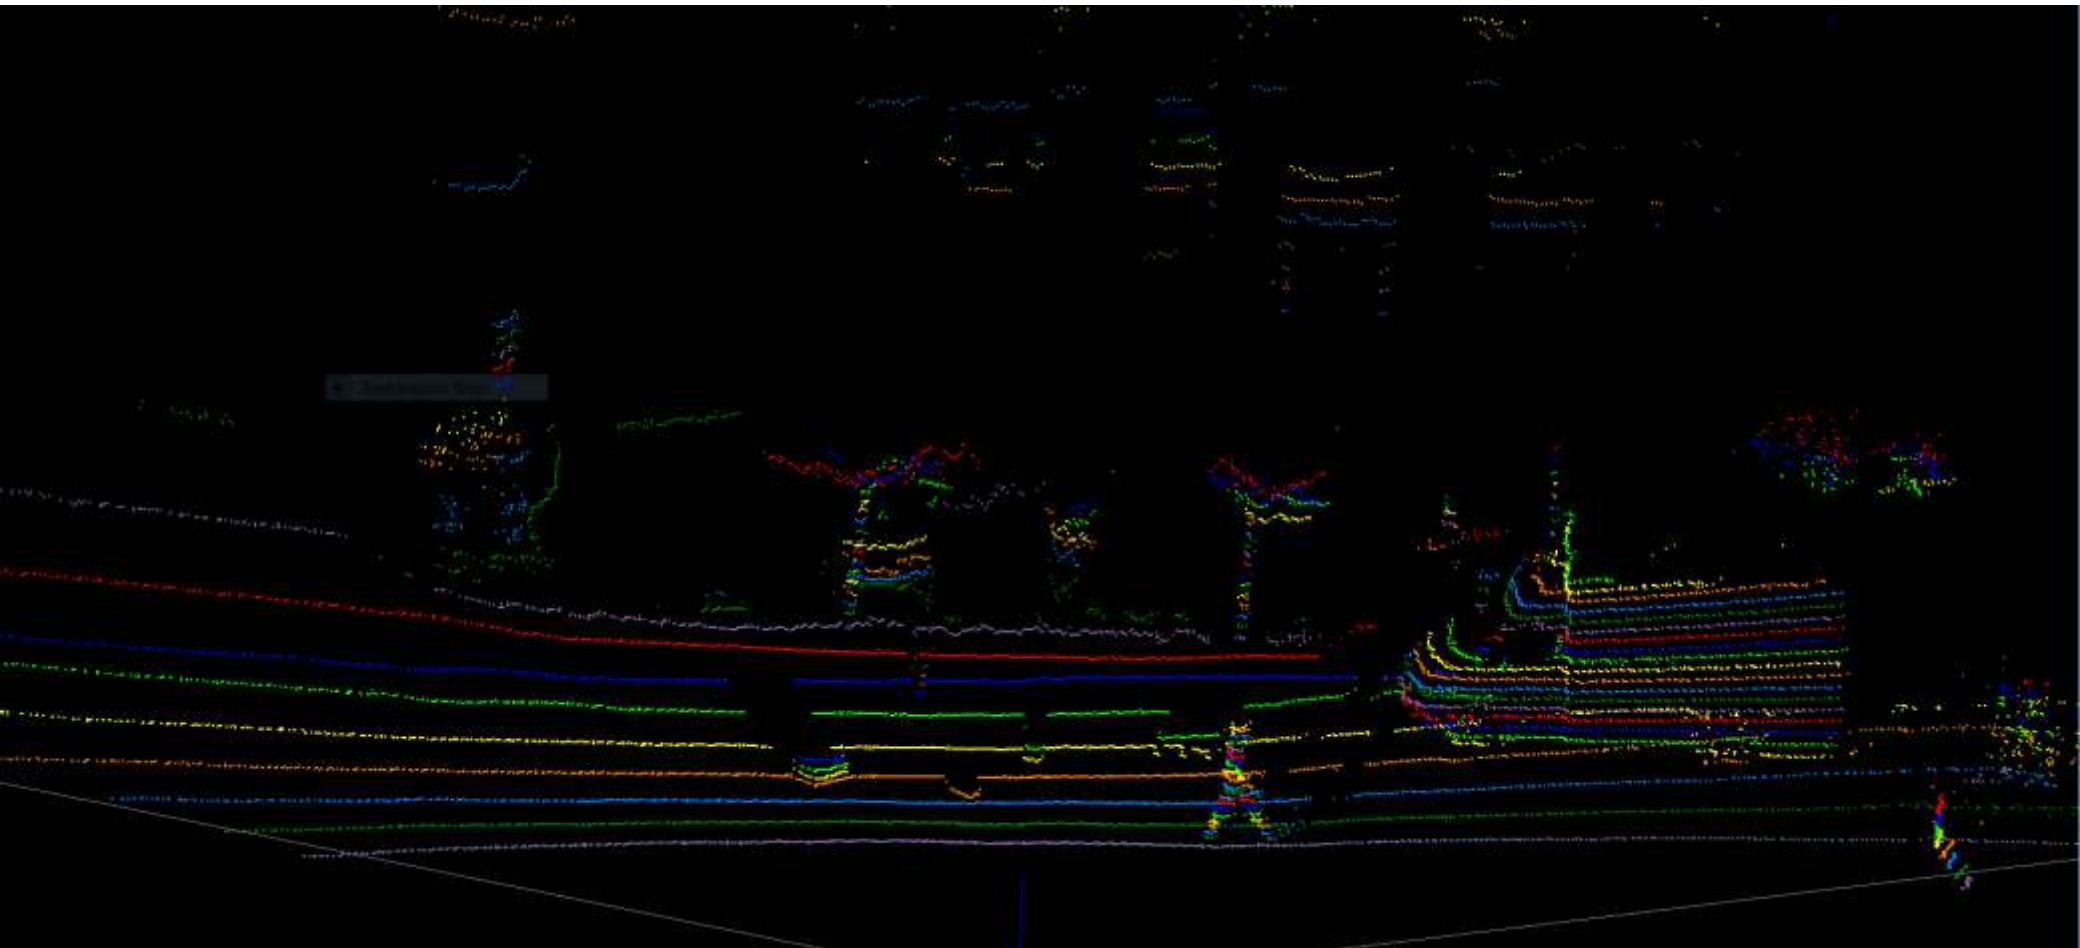

MANY THANKS FOR YOUR ATTENTION.



Andrew Etherington

Andrew.Etherington@eandm.com

+1 (650) 207-6050