




ISTITUTO ITALIANO
DI TECNOLOGIA
HUMANOIDS AND HUMAN
CENTERED MECHATRONICS



UNIVERSITÀ DI PISA








A ROS 2 Package for Online Cobots Impedance Modulation

Liana Bertoni^{1,2}, Luca Muratore¹, and Nikos Tsagarakis¹

¹ Humanoids and Human Centered Mechatronics (HHCM), Istituto Italiano di Tecnologia, Genova, Italy


² Dipartimento di Ingegneria Informatica (DII), University of Pisa, Pisa, Italy

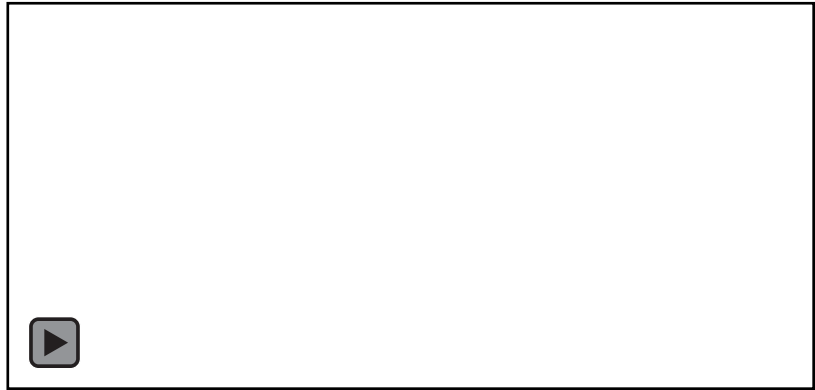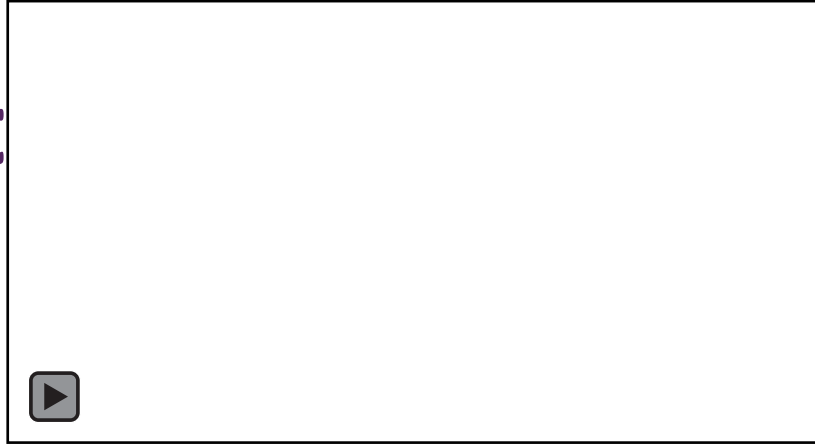

Flexibility Adaptation



ISTITUTO ITALIANO
DI TECNOLOGIA
HUMANOIDS AND HUMAN
CENTERED MECHATRONICS



UNIVERSITÀ DI PISA

At this purpose:

we propose a **ROS2** package aimed to unlock **flexibility** and **adaptability** of robot behaviors and interactions by exploiting a **variable impedance modulation** targeting *human-robot applications.*

ROS2






ISTITUTO ITALIANO
DI TECNOLOGIA
HUMANOIDS AND HUMAN
CENTERED MECHATRONICS



UNIVERSITÀ DI PISA

Principle behind

Drilling Task

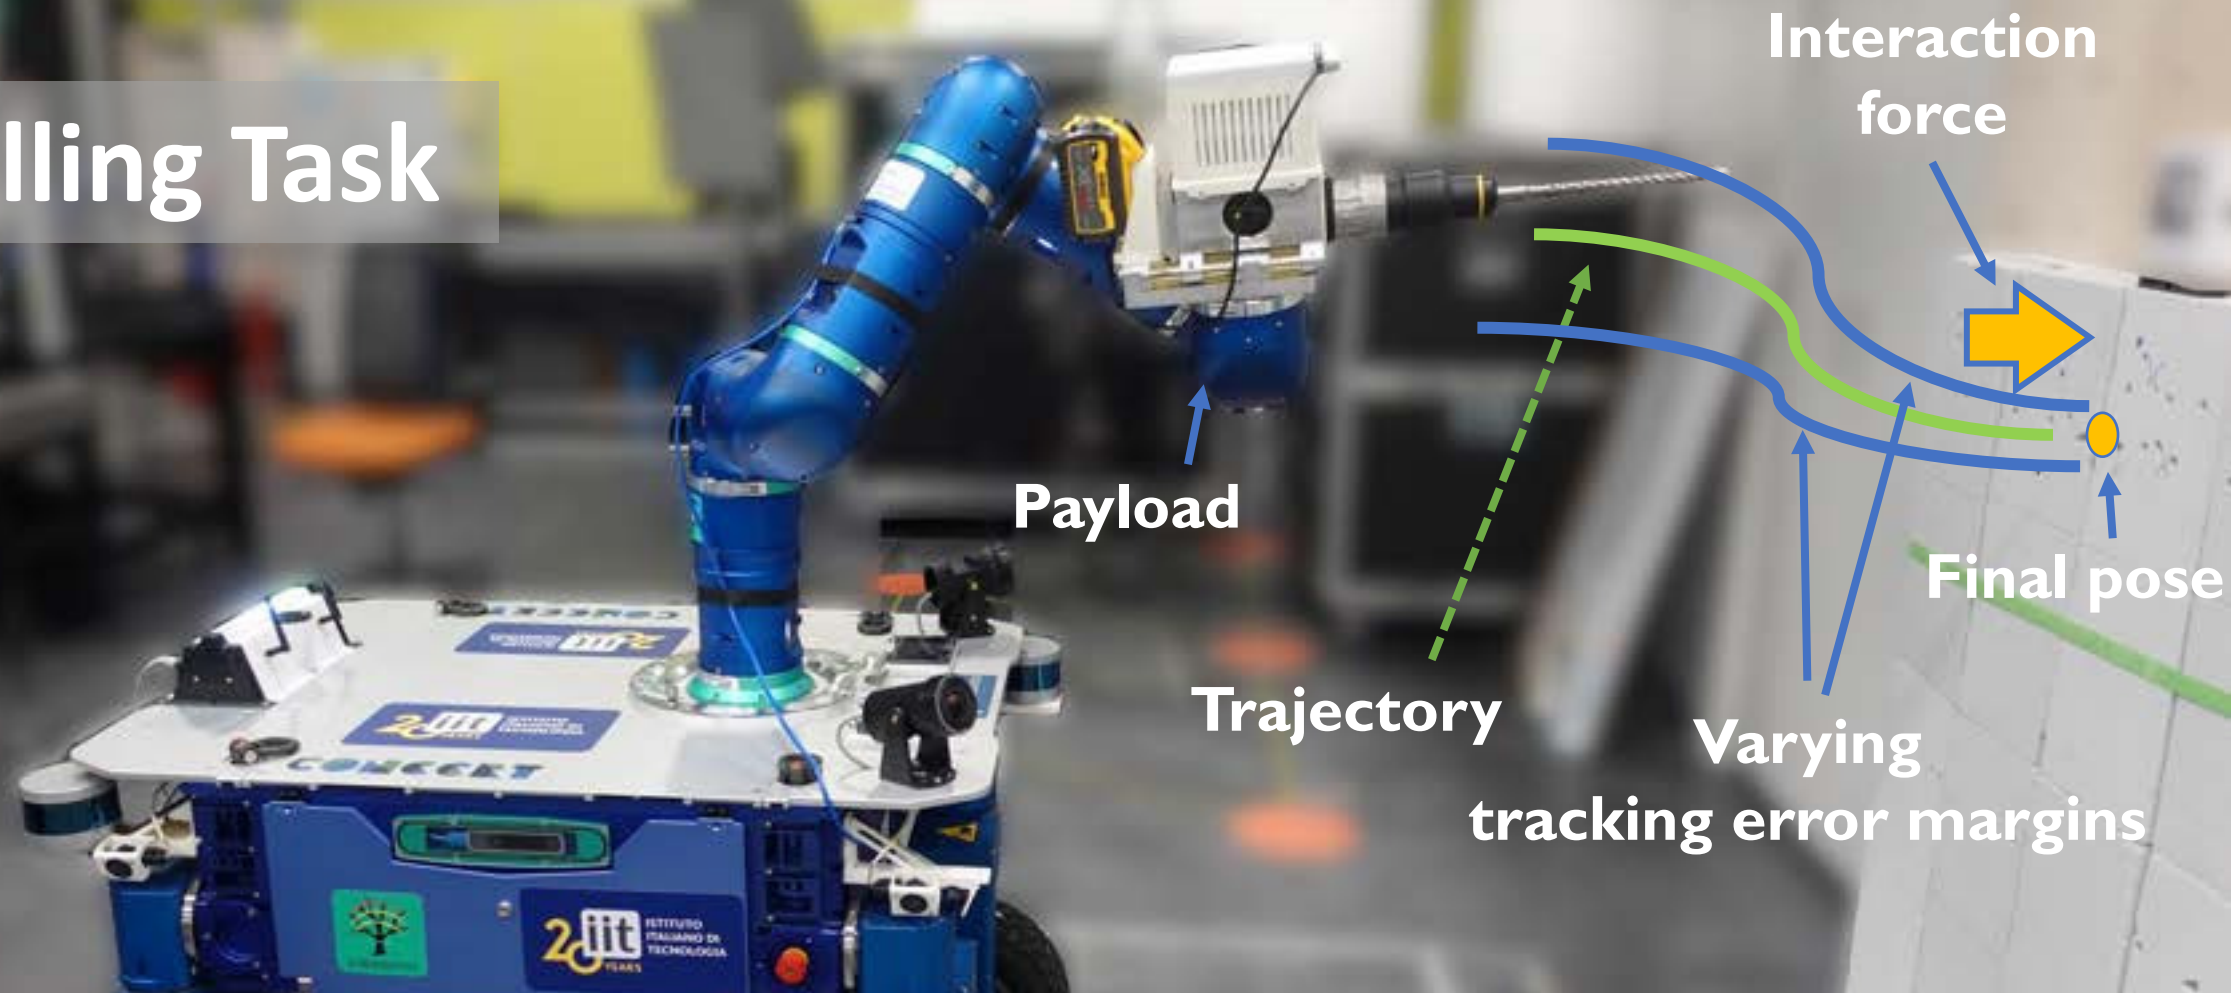

Robot impedance is **online** modulated based on

- task trajectory
- task force
- task precision

Task to Execute



drilling



pushing



assistance



- Task trajectory

- Task force

- Task precision

Task to Execute



drilling



pushing




assistance

ROS2 Package Inputs

- Task trajectory
- Task force
- Task precision

Variable Impedance Modulation

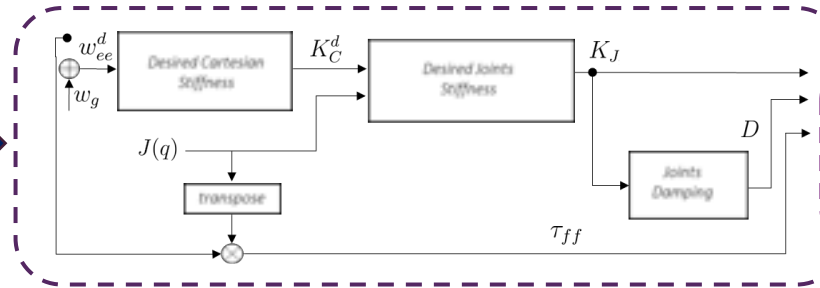

ROS2 Package Outputs

- stiffness
- damping

Robot Control





ISTITUTO ITALIANO
DI TECNOLOGIA
HUMANOIDS AND HUMAN
CENTERED MECHATRONICS



UNIVERSITÀ DI PISA

**How to use the package
By using ROS2 topics!**


Node_Settings.yaml

```

stiffness_preset
stiffness_constant
stiffness_maximum
damping_preset
damping_maximum
robot_initial_config
wrench_initial
precision_initial
transition_time
robot_urdf_model_path
robot_base_frame_name
robot_tip_frame_name
topic_subscriber_name
topic_publisher_name
rate
log_path
verbose
  
```

0. Configuration

Variable Impedance Modulation

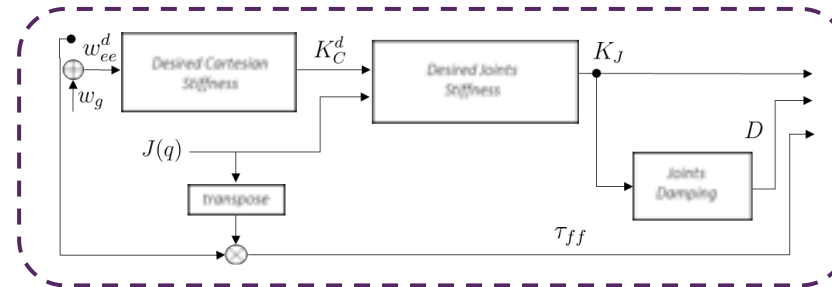

ROS2




Params

Node_Settings.yaml

stiffness_preset
stiffness_constant
stiffness_maximum
damping_preset
damping_maximum
robot_initial_config
wrench_initial
precision_initial
transition_time
robot_urdf_model_path
robot_base_frame_name
robot_tip_frame_name
topic_subscriber_name
topic_publisher_name
rate
log_path
verbose

0. Configuration

Variable Impedance Modulation

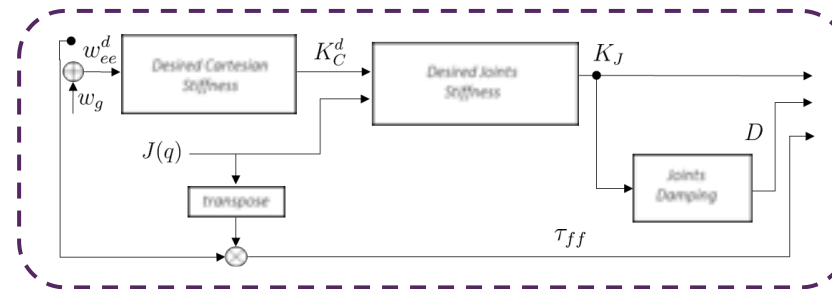

ROS2




Params

Node_Settings.yaml

stiffness_preset
stiffness_constant
stiffness_maximum
damping_preset
damping_maximum
robot_initial_config
wrench_initial
precision_initial
transition_time
robot_urdf_model_path
robot_base_frame_name
robot_tip_frame_name
topic_subscriber_name
topic_publisher_name
rate
log_path
verbose

0. Configuration

Variable Impedance Modulation

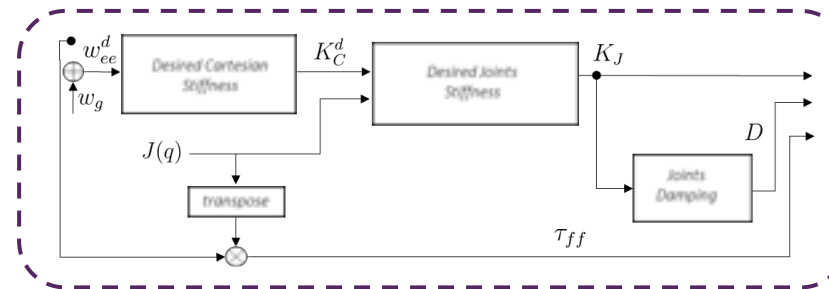

ROS2




Params

Node_Settings.yaml

stiffness_preset
stiffness_constant
stiffness_maximum
damping_preset
damping_maximum
robot_initial_config
wrench_initial
precision_initial
transition_time
robot_urdf_model_path
robot_base_frame_name
robot_tip_frame_name
topic_subscriber_name
topic_publisher_name
rate
log_path
verbose

0. Configuration

Variable Impedance Modulation

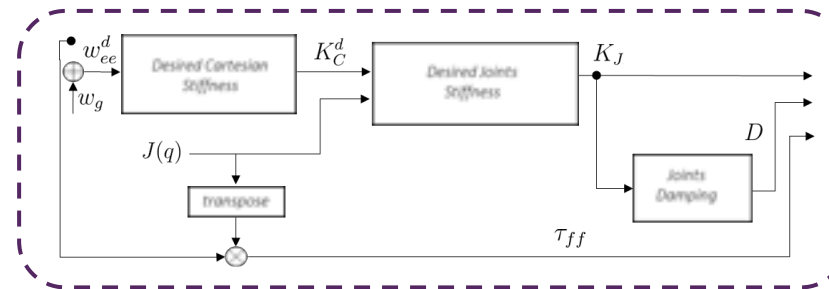

ROS2




Params

Node_Settings.yaml

stiffness_preset
 stiffness_constant
 stiffness_maximum
 damping_preset
 damping_maximum
 robot_initial_config
 wrench_initial
 precision_initial
 transition_time
 robot_urdf_model_path
 robot_base_frame_name
 robot_tip_frame_name
 topic_subscriber_name
 topic_publisher_name
 rate
 log_path
 verbose

0. Configuration

Variable Impedance Modulation

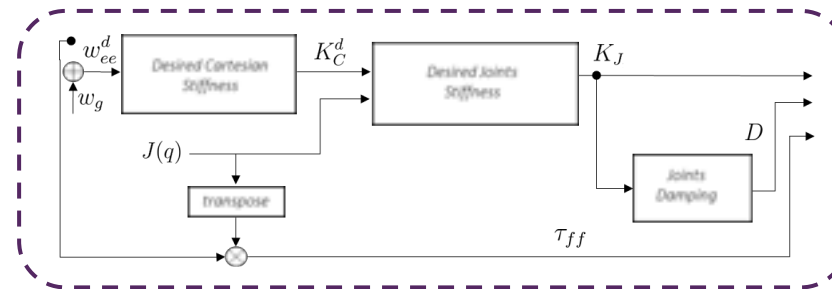

ROS2




Params

Node_Settings.yaml

stiffness_preset
 stiffness_constant
 stiffness_maximum
 damping_preset
 damping_maximum
 robot_initial_config
 wrench_initial
 precision_initial
 transition_time
 robot_urdf_model_path
 robot_base_frame_name
 robot_tip_frame_name
 topic_subscriber_name
 topic_publisher_name
 rate
 log_path
 verbose

0. Configuration

Variable Impedance Modulation

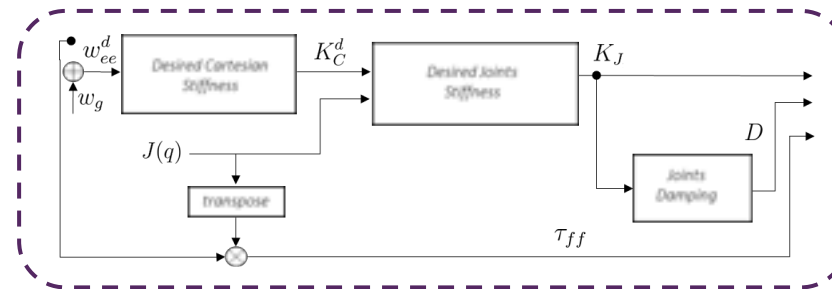

ROS2



Params




user

```
bool cartesian_space
float64[] joints_position
float64[] joints_position_reference
float64[] task_pose_reference
float64[] task_wrench
float64[] task_precision
```

1. Publish inputs

Variable Impedance Modulation

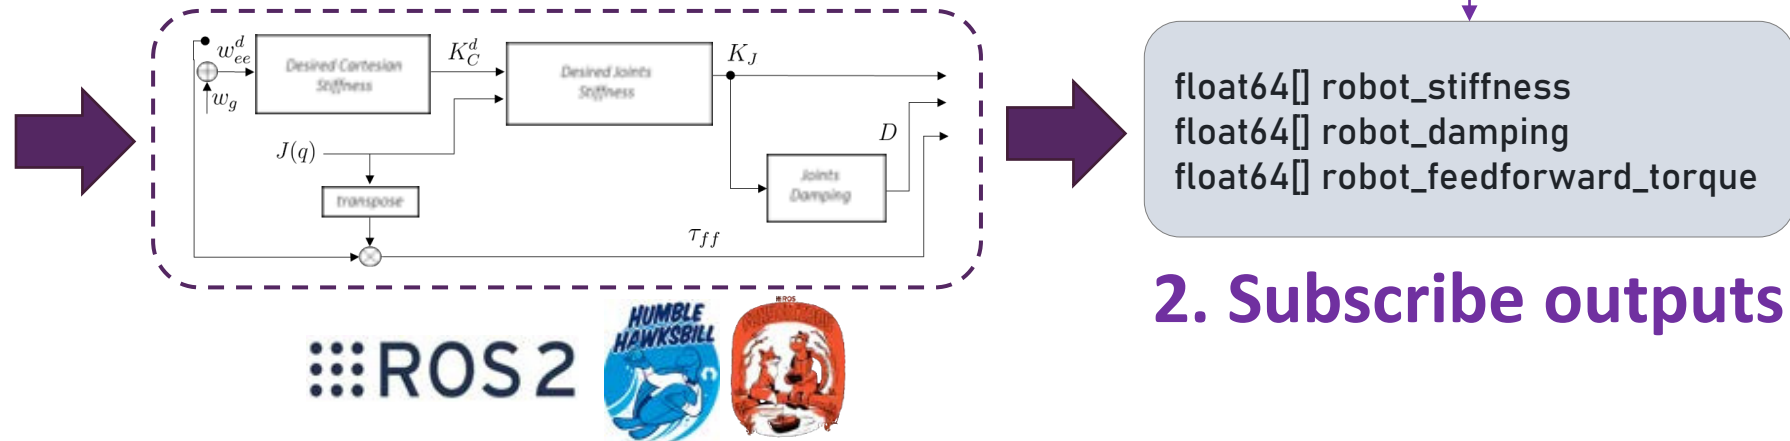


2. Subscribe outputs

Every Iteration!



ISTITUTO ITALIANO
DI TECNOLOGIA
HUMANOIDS AND HUMAN
CENTERED MECHATRONICS



UNIVERSITÀ DI PISA


How the package works


```
lliana@lliana-M5-7820: ~/catkin_ws
lliana@lliana-M5-7820: ~/ros2_ws 94x27
lliana@lliana-M5-7820: ~/ros2_ws $ ros2 launch rim impedance_modulation_centauro.launch.py
```

Ros2 node: variable impedance modulation

```
lliana@lliana-M5-7820: ~/ros2_ws 94x27
lliana@lliana-M5-7820: ~/ros2_ws $ ros2 launch utility_nodes task_planner_centauro.launch.py
```

Ros2 node: task planner

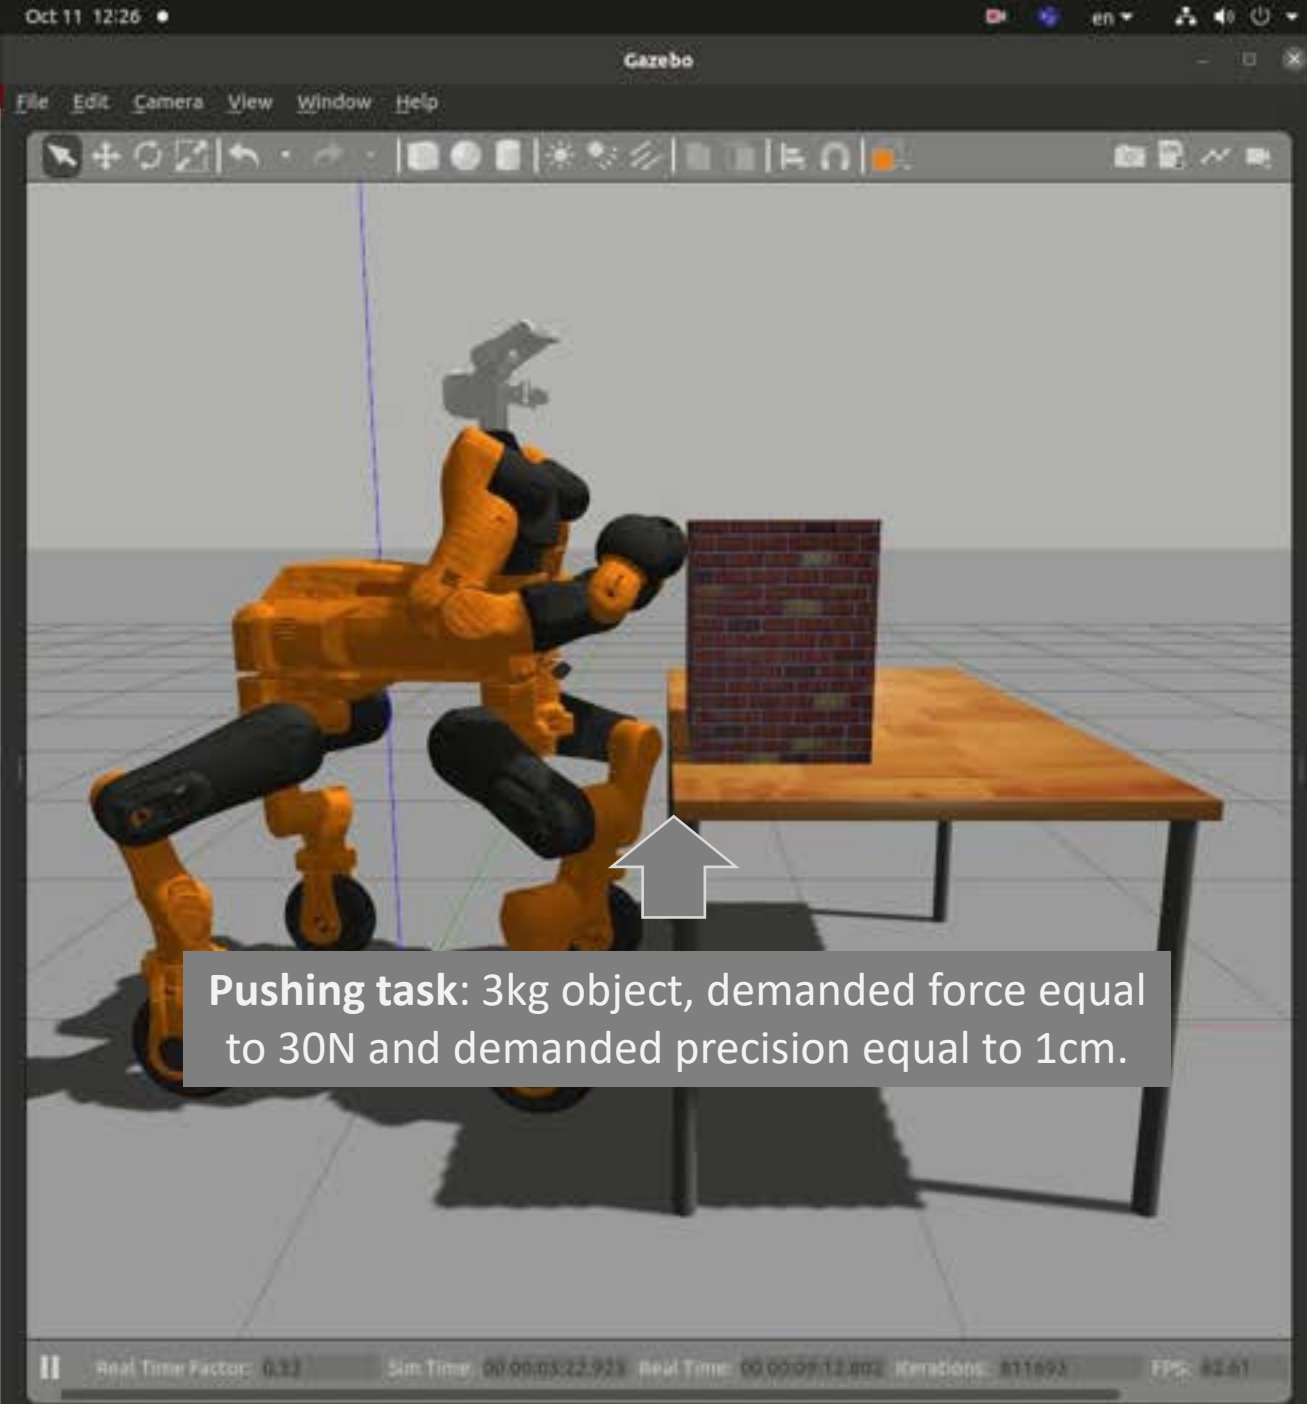


Pushing task: 3kg object, demanded force equal to 30N and demanded precision equal to 1cm.






ISTITUTO ITALIANO
DI TECNOLOGIA
HUMANOIDS AND HUMAN
CENTERED MECHATRONICS



UNIVERSITÀ DI PISA


Centauro



pushing




ISTITUTO ITALIANO
DI TECNOLOGIA
HUMANOIDS AND HUMAN
CENTERED MECHATRONICS




UNIVERSITÀ DI PISA

Centauro




pushing

Concert




drilling





ISTITUTO ITALIANO
DI TECNOLOGIA
HUMANOIDS AND HUMAN
CENTERED MECHATRONICS



UNIVERSITÀ DI PISA

Inail 2 arm




assistance





ISTITUTO ITALIANO
DI TECNOLOGIA
HUMANOIDS AND HUMAN
CENTERED MECHATRONICS



UNIVERSITÀ DI PISA

ROS2



readme

- **Source code**

<https://github.com/ADVRHumanoids/RobotImpedanceModulation>


- **Documentation/Instructions**

<https://github.com/ADVRHumanoids/RobotImpedanceModulation>

- **Projects**

CONCERT: <https://concertproject.eu/>

HARIA: <http://haria-project.eu/>



- **Publications**


“Bertoni, Liana, et al. "Task Driven Online Impedance Modulation." *2022 IEEE-RAS 21st International Conference on Humanoid Robots (Humanoids)*. IEEE,2022”
<https://ieeexplore.ieee.org/abstract/document/10000215>

“An Assistive Human-Robot Bi-Manual Co-Manipulation System for Subjects with Upper Limb Motion Deficiencies” (ICRA submitted)





ISTITUTO ITALIANO
DI TECNOLOGIA
HUMANOIDS AND HUMAN
CENTERED MECHATRONICS



UNIVERSITÀ DI PISA



THANK YOU FOR YOUR ATTENTION!

ANY QUESTIONS?

A ROS 2 Package for Online Cobots Impedance Modulation

Liana Bertoni, Luca Muratore, and Nikos Tsagarakis